

TECHNICAL SPECIFICATION


GIANT-C⁺

Washer



	Non-Heater	Heater
CYLINDER		
Drum Volume	cu.ft (l) 3.6 (102.7)	3.6 (102.7)
Diameter	in. (mm) 22.1 (560)	22.1 (560)
Depth	in. (mm) 16.5 (419.3)	16.5 (419.3)
Capacity	lb (kg) 22.5 (13)	22.5 (10.2)
DIMENSIONS		
Product (WxHxD)	in. (mm) 27 (686) x 38.7 (983) x 30.2 (767)	27 (686) x 38.7 (983) x 30.2 (767)
With Door Opening	in. (mm) 50.8 (1,291)	50.8 (1,291)
Carton (WxHxD)	in. (mm) 29.7 (755) x 44.4 (1,127) x 31.3 (795)	29.7 (755) x 44.4 (1,127) x 31.3 (795)
Weight (Product/Carton)	lb (kg) 191.8 (87)/211.6 (96)	191.8 (87)/211.6 (96)
SPEED		
Wash	RPM 50	50
Extract (High Speed)	RPM 1,150	1,150
G-force	G 413	413
RATING		
Electric Ratings	V/Hz/A 120/60/5 220-240/50/5 220/60/5	220-240/50/15-17.5
WATER USAGE		
Water Consumption	gal (l) 13.4 (50.8)	13.4 (50.8)
NOISE & CYCLE TIME		
Noise Level (Sound Power)	dB Lower than 62	Lower than 62
Program Duration in Minutes (Default)	min 36	60 (60°C Program)
SYSTEM & CONTROL		
Inverter Direct Drive Motor	0	0
Intelligent Electronics Controls	0	0
Heating System	W -	3,600
Compartment Dispenser	3 Compartment Dispensers	3 Compartment Dispensers
Forced Drain System	0	0
Pricing Program	Special Vended Price	Special Vended Price
PROGRAMS		
	Hot 90°C (194°F)	
	Warm 75°C (167°F)	
	Cold 60°C (140°F)	
	Delicates 40°C (104°F)	
	Add Super Wash * Custom PGM	Cold
	-	Delicates * Rinse+Spin
PROGRAM LIST		
	Hot	90°C (194°F)
	Warm	75°C (167°F)
	Cold	60°C (140°F)
	Delicates	40°C (104°F)
	Add Super Wash * Custom PGM	Cold
	-	Delicates * Rinse+Spin
EXTERNAL FINISH		
Drum	Stainless Steel Drum	Stainless Steel Drum
Top Plate	Porcelain (Single) / Powder Painted Steel (Stack)	Porcelain (Single) / Powder Painted Steel (Stack)
Transparent Glass Window Door	0	0
Color	Platinum	Platinum
Cabinet	Painted Steel	Painted Steel
Cabinet Cover	Powder Painted Steel	Powder Painted Steel
Control Panel	Powder Painted Steel	Powder Painted Steel
Panel Frame	Powder Painted Steel	Powder Painted Steel
Panel Frame Lower	Powder Painted Steel	Powder Painted Steel
Window Display	Silk Screen	Silk Screen
Window	Aluminium	Aluminium
CIRCUIT PROTECTION		
PCB Fuse - Main Control Board	amps 8 (220-240V) 12 (120V)	8 (220-240V)
PCB Fuse - Filter Assembly	amps 15	15
COIN		
	Non-Heater	Heater
	Card	OPL
Single	Com F1069FD4P GCWP1069QS2 FH069FD4P	Card F1069FD7P GCWP1069CS2 FH069FD7P
Stack	F1069FDP GCWP1069QD2 FH069FDP	Heater F1069FD25 WD-1069BD25 F1069FD25P

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.

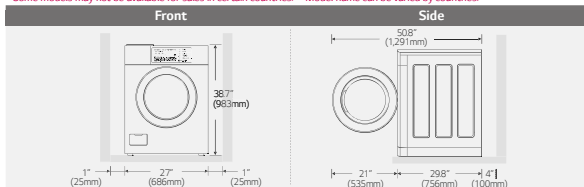

Dryer



Weather Hood Type	Number of 8" Elements	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended	0	65 feet (19.8m)	45 feet (13.7m)
	1	55 feet (16.8m)	35 feet (10.7m)
	2	47 feet (14.3m)	30 feet (9.1m)
	3	36 feet (11.0m)	25 feet (7.6m)
	4	28 feet (8.5m)	20 feet (6.1m)
Use Only for Short Run Installations	0	55 feet (16.8m)	35 feet (10.7m)
	1	47 feet (14.3m)	27 feet (8.2m)
	2	41 feet (12.5m)	21 feet (6.4m)
	3	30 feet (9.1m)	17 feet (5.2m)
	4	22 feet (6.7m)	15 feet (4.5m)

	Gas	Electric
CYLINDER		
Drum Volume	cu.ft (l) 7.3 (207)	7.3 (207)
Diameter	in. (mm) 26.1 (663)	26.1 (663)
Depth	in. (mm) 22.5 (570.6)	22.5 (570.6)
Capacity	lb (kg) 22.5 (10.2)	22.5 (10)
DIMENSIONS		
Product (WxHxD)	in. (mm) 27 (686) x 38.7 (983) x 30.1 (764)	27 (686) x 38.7 (983) x 30.1 (764)
With Door Opening	in. (mm) 49.8 (1,264)	49.8 (1,264)
Carton (WxHxD)	in. (mm) 29.9 (760) x 46.1 (1,170) x 31.3 (795)	29.9 (760) x 46.1 (1,170) x 31.3 (795)
Weight (Product/Carton)	lb (kg) 130 (59)/143 (65)	130 (59)/143 (65)
RATING		
Electric Ratings	V/Hz/A 120/60/5 220-240/50/2.4 220/60/3	120 (240)/60/2.5 220-240/50/22.5 220/60/21 240/50/19.5
OPERATION		
Heating Type	Gas	Electric
Type of Drying	Ventilation	Ventilation
Air Flow	CFM 160	160
Motor	KW 0.4 (120V/60Hz) 0.3 (220-240V/50Hz) 0.4 (220V/60Hz)	0.4 (120V/60Hz) 0.3 (220-240V/50Hz) 0.4 (220V/60Hz)
Gas Ratings	KW/BTU 5.8/20,000	-
Heating Element	W -	5,400 ¹⁾
Program Duration in Minutes (Default)	min 45	45
CONNECTIONS		
Air Outlet Diameter	in. (mm) 4 (100)	4 (100)
Exhaust Airflow Diameter	in. (mm) 4 (100)	4 (100)
SYSTEM & CONTROL		
Pricing Program	Special Vended Price	Special Vended Price
Intelligent Electronic Controls	0	0
PROGRAMS		
Program List	High Temp Med Temp Low Temp No Heat	High Temp Med Temp Low Temp No Heat
EXTERNAL FINISH		
Top Plate	Porcelain (Single) / Powder Painted Steel (Stack)	Porcelain (Single) / Powder Painted Steel (Stack)
Transparent Glass Window Door	0	0
Color	Platinum	Platinum
Cabinet	Painted Steel	Painted Steel
Cabinet Cover	Powder Painted Steel	Powder Painted Steel
Control Panel	Powder Painted Steel	Powder Painted Steel
Panel Frame	Powder Painted Steel	Powder Painted Steel
Panel Frame Lower	Powder Painted Steel	Powder Painted Steel
Window Display	Silk Screen	Silk Screen
Window	Aluminium	Aluminium
COIN		
	Gas	Electric
	Card	OPL
Single	Com RN1329AN4 GD1329QGS2	Card RN1329AD1 GD1329CES2 RN1329AD45 GD1329QGS2
Stack Upper	RN1329AN7S GD1329QGW2 RP1329AN7S	RN1329AD5S GD1329QGW2
Stack Lower	RN1329AN1 GD1329QGD2	RN1329A7S GD1329QEW2

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.
1) 4,500W for some countries due to power limitation (e.g. Australia)

