

LOW SPIN WASHER

RELIABILITY AND ROBUSTNESS

MAO2 - B60 - TC

FEATURES

- · Low spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor. Anchoring base to order separately (not included).
- G Force 100.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and
- 3 water inlets.
- · These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.

TOUCH CONTROL



HOT & COLD MIX



WET CLEANING



THIRD WATER INTAKE



EFFICIENT DRUM

OPTIONS

- · Double drain kit, allow the recovery of the water, with important water savings.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- · Anchorage base for correct fixation of the washer to the floor.
- 8 mm holes drum.
- Voltage 230 V III 50/60 Hz.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



OPTIMAL LOADING



STAINLESS STEEL STANDARD




IMBALANCE INVERTER



EASY MAINTENANCE

TECHNICAL DATA	UNIT.	MAQ2 - B60 - TC
DRUM		
Load capacity 1:9 / 1:10	kg	67/60
Volume	I	600
Diameter	mm	1.048
Depth	mm	684
GENERAL DETAILS		
Washing speed / Spining speed	r.p.m.	42,5/416
G Factor	-	100
Maximum force transmitted	KN	9,3 ±1,2
Frequency-dynamic force	Hz	6,93
Self-service version	-	Yes
Double drain	-	Opt
Option 8mm holes drum	-	Yes
DOOR		
Height center door / Height door	mm	900/540
Diameter	mm	560
POWER		
Motor	kW	5,5
Heating (Electric model)	kW	28,8
Max. power (Electric model)	kW	31,3
Max. power (steam and hot water)	kW	5,5
CONNECTIONS		ELECTRICAL STEAM / HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	-
Tension 230V- III + T	N° x mm2 / A	3 x 25 / 100A 3 x 1,5 / 6A
Tension 400V- III + N + T	N° x mm2 / A	3 x 16 / 63A 3 x 1,5 / 16A
Steam inlet (Steam mod.)	inch	3/4"
Maximum steam consumption (Steam mod.)	Kg/h	21
Water inlet	inch	3/4"
Water main pressure	Kgs/cm2	2-4
Maximum water consumption*	Lit/h	627,9
Drain	mm/inch	3"
Drainage capacity	Lit/min	200
DIMENSIONS / PACKING DIMENSIONS		
Width / Width	mm	1.225/1.360
Depth / Depth	mm	1.279/1.460
Height / Height	mm	1.640/1.880
Net weight / Gross weight	kg	930/1.050
Volume	m³	3,73

* N°2 Program, 100% load

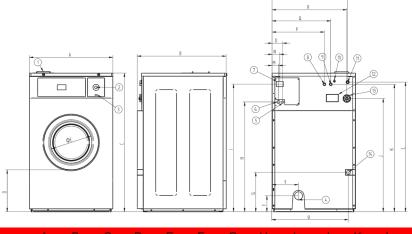

- 01. Soap dispenser
- 02. Emergency stop
- 03. Usb port
- 04. Drain
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection
- Cold water inlet
- 12. Blur output / water overload
- 13. Liquid soap connection
- 14. Steam connection

1	4 B	С	D	E	F	G	H	- 1	J	K	L	M	N	O	Р	Q	R	S	T	U
MAQ2 - B60 1.2	225 1.279	1.640	539	560	98	631	1.367	1.535	1.385	1.550	1.550	61	74	101	750	830	1.110	1.150	270	1.163

American Global Trade and Tech LLC

Address: 1621 Central Ave Cheyenne WY 82001, Wyoming State USA

Phone: 307-637-5151 / Fax: 307-637-5152

E-mail: sales@lacasalaundry.com / Website: lacasalaundry.com



